


**EG-TRZ-42-H PILOT OPERATED PROPORTIONAL, PRESSURE REDUCING/RELIEVING**

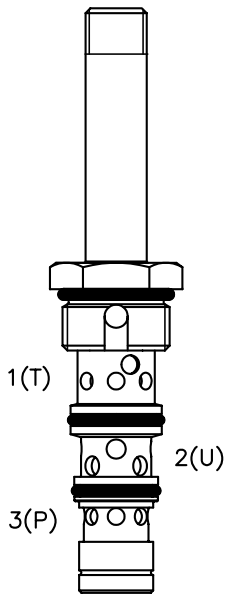

**DESCRIPTION**

Special cavity, 7/8-14 thread, pilot operated proportional pressure reducing/relieving valve.

**OPERATION**


The EG-TRZ-42-H generates a variable pressure in response to a PWM (Pulse Width Modulated) current signal. With no current applied to the proportional solenoid, the inlet port 3 (P) is blocked and the regulated port 2 (U) is vented to port 1 (T).

As current is increased, fluid pressure is proportionally controlled at the regulated port 2 (U). On attainment of proportionally determined pressure at 2 (U), the cartridge shifts to block flow at 3 (P), thereby regulating pressure at 2 (U). In this mode, the valve also will relieve 2 (U) to 1 (T) at a variable value over the set reducing pressure.

**FEATURES**

- Hardened parts for long life.
- Efficient wet-armature construction.
- Unitized valve/coil.
- Continuous duty rated solenoid.


**HYDRAULIC SYMBOL**



**PERFORMANCE**

**Pressure vs. Current characteristic**

Oil viscosity 46 cSt @ 45°C

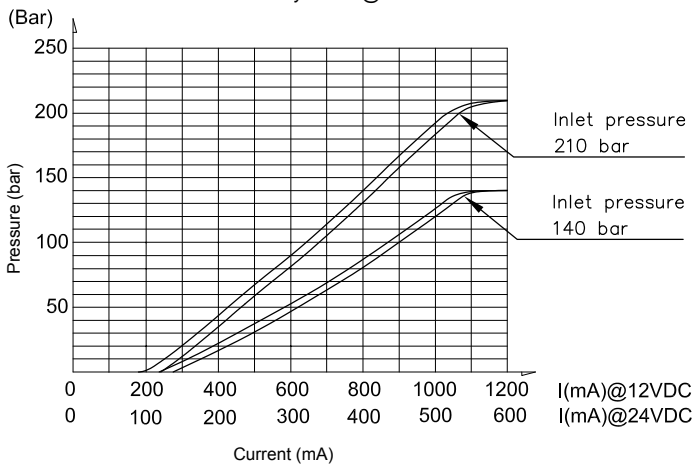

**VALVE SPECIFICATIONS**

Nominal Flow	7.9 GPM (30 LPM)
Max Inlet Pressure	3500 PSI (241 bar)
Controlled Pressure Range	(see graph)
Max Internal Leakage	1500 ml/min @ 200 bar inlet pressure
Max Back-Pressure at T Port	20 bar
Viscosity Range	36 to 3000 SSU (3 to 647 cSt)
Filtration	ISO 18/15/13
Media Operating Temp. Range	-30°C / +100°C
Weight	.63 lbs (.29 kg)
Operating Fluid Media	General Purpose Hydraulic Fluid
Cartridge Torque Requirements	16 ft-lbs (30 Nm)
Coil Nut Torque Requirements	1-2 ft-lbs (2-3 Nm)
Cavity	T042
Cavity Tools Kit (form tool, reamer, tap)	K-T042

**COIL SPECIFICATIONS**

Current Supply Characteristics	PWM (Pulse Width Modulation)
Rated Current Range	100-1200 mA with 12 VDC Coil 50-600 mA with 24 VDC Coil
PWM or Super-Imposed	
Dither Frequency	150-200 Hz
Coil Resistance	6.85 Ohm ±5% at 68°F (20°C) 12 VDC 27 Ohm ±5% at 68°F (20°C) 24 VDC
Max Power Consumption	21 Watt

**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526  
mail: delta@delta-power.com • www.delta-power.com





Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512  
mail: tecnord@tecnord.com • www.tecnord.com

**DIMENSIONS**

**Pressure Drop vs. Flow characteristic**

Oil viscosity 46 cSt @ 45°C

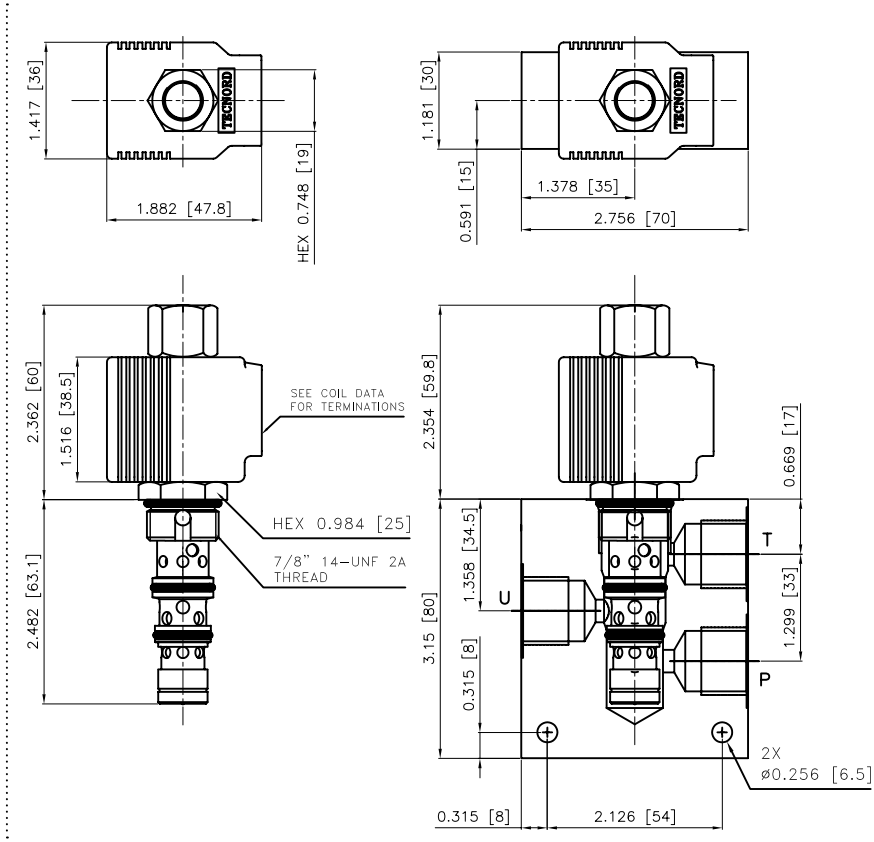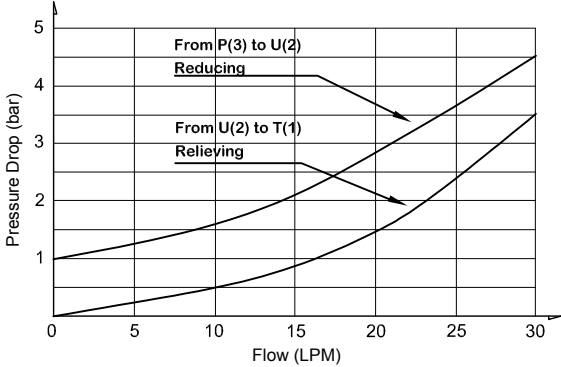

**ORDERING INFORMATION**

Approximate Coil Weight: .42 lbs (.19 kg)

<p><b>EG-TRZ-42-H -</b></p> <p><b>MAX REGULATED PRESSURE</b></p> <p>140 bar</p> <p>210 bar</p>	<p><b>OPTIONS</b></p> <p>00 - Polyurethane Standard</p>	<p><b>"PJ" COIL TERMINATION</b></p> <p>JH - DIN 43650 (Hirschmann)</p> <p>JA - AMP Superseal</p> <p>JD - Deutsch DT04-2P</p> <p>JJ - AMP Jr. Timer</p>	<p><b>VOLTAGE</b></p> <p>12 - 12 VDC</p> <p>24 - 24 VDC</p>	<p><b>BODIES</b></p> <p>Blank - Without body</p> <p>N - 3/8" BSP Ports</p>
--	---	--	---	--

W 5 / 2018

**WARNING:** the specifications/application data shown in our catalogs and data sheets are intended only as a general guide for the product described (herein). Any specific application should not be undertaken without independent study, evaluation, and testing for suitability.



4484 Boeing Drive Rockford, IL 61109 • USA • Phone +1 (815) 397-6628 • Fax +1 (815) 397-2526  
 mail: delta@delta-power.com • www.delta-power.com



Via Malavolti, 36 • 41122 Modena • ITALY • Phone +39 (059) 254895 • Fax +39 (059) 253512  
 mail: tecnord@tecnord.com • www.tecnord.com